

E-STOP 50

The ultimate selection

Find the perfect E-Stop with ease

We've created a comprehensive comparison table to help you quickly find the ideal E-Stop by checking key technical characteristics.


- Screw or push-in terminals
- Non-illuminated and illuminated
- Modular contact blocks up to 3 NC contacts



- 40 mm actuator head
- 22 or 16 mm modular construction
- Non-illuminated up to 4NC
- IP65
- Screw terminals
- Illuminated up to 1NO, 3NC



- 16 or 22 mm unibody
- 30 mm actuator head
- IP65, IP67 & IP69K
- Illuminated 2NC
- Non-illuminated 1NO, 2NC
- Solder or solder/tab terminals

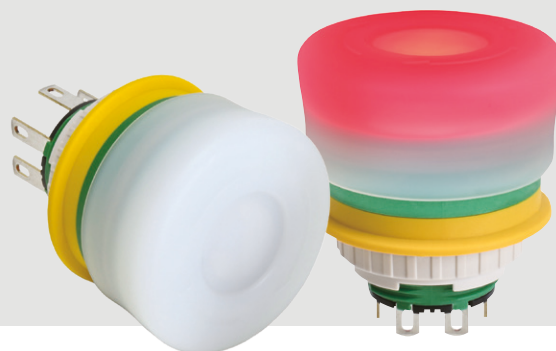

A COLOR-CHANGING E-STOP: WHY?

The clear visual signal enables operators to instantly identify machine status and react, enhancing safety by eliminating confusion in time-critical situations. Also available in a low voltage version – ideal for belly box applications.



Fast shipping for rapid implementation

> [Where to buy](#)



VERSATILE FOR INDUSTRIES

Ideal for manufacturing, robotics, material handling and more

> [Explore applications](#)



Meets ISO 13850 & IEC 60947-5-5 for trusted safety

> [Learn more](#)



Advanced features and reliability at a competitive price

SAFETY MADE SIMPLE: Don't compromise on the most important button in your facility.
WEBSITE: <https://mktg.idec.com/en-gb/estop50>

IDEC