

Product data

Product code	VI03-0011	STK-code	6436009	EAN-code	6410064360097
Product name	Grounding ball stud $\varnothing 25$ -M12				
Tyyppi	Straight with female thread				

Technical data

Max. Short-circuit current I_k 1 s	29,6	kA
Max. Cable cross section	150	mm ²
Fixed ball point (Diameter)	25	mm
Thread (Dimension)	M12	mm
Width	SW27	mm
Tightening torque	M12 80	Nm
Weight	208	g



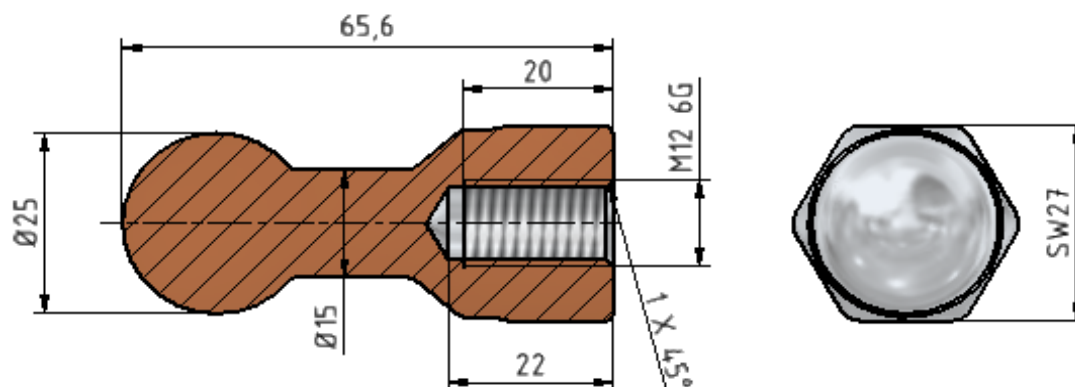
Standards **SFS 3742:1985, EN 61230:2008 (5.7.)**

Color/ Material **Tin plated / Copper**

Mounting/ Connection **Screw M12, Min. 8.8**

Description

Permanent grounding ball studs to be used for grounding in different electrical systems such as switchgear, bus bars, conductors, vehicles, reels etc. The Grounding ball stud is made of forged copper and it is coated by Tin (Sn)

Drawing

Package

Package	Box	pcs/ package	20	Weight [Kg]	4,20
Length [mm]	120	Width [mm]	130	Height [mm]	100